



## CARLISLE'S **SURE-WELD**<sup>®</sup> PRE-FABRICATED TPO ACCESSORIES

Innovative, Flexible, Efficient, High-Performing & Economical. Offering economical alternatives to field fabrication in both standard and custom hard-to-flash situations, contractors and owners are saving time and money with Carlisle's easy-to-install, pre-fabricated accessories.



### Split Pipe Seals

Sure-Weld TPO Split Pipe Seals are fabricated flashings made of 45-mil reinforced Sure-Weld membrane. Split (cut) and overlap tabs allow the pipe seals to be opened and wrapped around a round pipe with an obstruction.

#### Split Pipe Seals

##### Typical Properties and Characteristics

Sizes:	1", 2", 3", 4", 5" and 6" O.D. Pipe (25.4, 50.8, 76.2, 101.6, 127.0 and 152.4 mm)
Packaging:	8 per box
Weight (each):	0.55 lbs. (0.25 kg)
Material:	Reinforced 45-mil TPO membrane
Color:	White



### Square Tubing Wraps

Sure-Weld TPO Square Tubing Wraps are made of 45-mil reinforced Sure-Weld membrane. A split (cut) and overlap tab allow the seals to be opened and wrapped around square tubing.

### Square Tubing Wraps

##### Typical Properties and Characteristics

Sizes:	3" (76 mm) x 3" (76 mm) 4" (102 mm) x 4" (102 mm) 6" (152 mm) x 6" (152 mm)
Packaging:	8 per box
Weight (carton):	5.0 lbs (2.3 kg)
Material:	Reinforced 45-mil TPO membrane
Color:	White



### Curb Wrap Corners

Sure-Weld TPO Curb Wrap Corners are made of 45-mil reinforced Sure-Weld membrane. With six sizes available to fit curbs up to 6' by 6', this innovative product reduces installation time compared to conventional flashing methods.

#### Curb Wrap Corners

##### Typical Properties and Characteristics

Corner Sizes:	7, 13, 19, 25, 31 and 37 inches (18, 33, 48, 64, 79 and 94 cm)
Curb sizes finished:	12, 24, 36, 48, 60 and 72 inches (30, 61, 91, 122, 152 and 183 cm)
Packaging:	12 per box
Weight (each):	0.5, 0.9, 1.3, 1.7, 2.0 and 2.4 pounds (0.2, 0.4, 0.6, 0.8, 0.9 and 1.1 kg)
Material:	Reinforced 45-mil (1.1 mm) TPO membrane
Color:	White (only)



ROOFING AMERICA: OVER 40 YEARS AND 10 BILLION SQUARE FEET™

**800-4-SYNTEC**  
www.carlisle-syntec.com

Carlisle SynTec Incorporated  
P.O. Box 7000 • Carlisle, PA 17013  
International: 717-245-7000  
Fax: 717-245-7143  
market@syntec.carlisle.com



Carlisle SynTec Incorporated



## CARLISLE'S **SURE-WELD**<sup>®</sup> PRE-FABRICATED TPO ACCESSORIES




### Cover Strip

Sure-Weld Pressure-Sensitive Cover Strip is TPO membrane laminated to a fully cured synthetic rubber pressure sensitive adhesive. Available in white, gray and tan, PS Cover Strip provides maximum protection against inclement weather and is ideal for stripping in shop bent metal drip edge.

#### Cover Strip

##### Typical Properties and Characteristics

Color:	White, Gray, Tan
Base:	Membrane - TPO, Adhesive - Synthetic Rubber Solids 100%
Breaking Strength:	340 lbf (1.5 kN)
Elongation @ break of fabric:	25%
Tear Strength:	130 lbf (578 N)
Ozone Resistance: Condition after exposure to 100 pphm Ozone in air for 168 H @ 104°F (40°C)	No cracks
Brittleness Temp:	-50°F (-46°C)
Nominal Thickness:	0.080" (2.03 mm)
Nominal Width:	Membrane- 6" (150 mm) Adhesive - 6 3/16" (155 mm)
Net Weight:	Per Roll 22 lbs (10 kgs),
Packaging:	Two Rolls/Ctn. (Two 150 mm Rolls/Ctn.)
Shelf Life:	1 Year

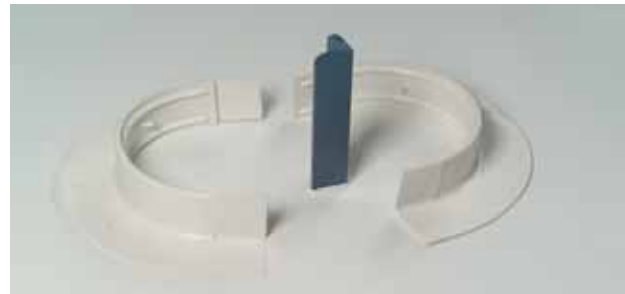

### Molded Sealant Pockets

Carlisle Molded TPO Sealant Pockets consist of an interlocking, two-piece, injection molded flexible pocket with a rigid polypropylene vertical wall and preformed deck flanges. Used with Carlisle sealant and primer, this product effectively waterproofs pipe clusters or other odd shaped penetrations on Sure-Weld roofing systems.

#### Molded Sealant Pockets

##### Typical Properties and Characteristics

Size:	7.5" by 6" oval (19 cm by 15 cm)
Packaging:	5 pockets/carton
Weight (each):	0.55 lbs (0.25 kg)
Material:	Non-Reinforced TPO
Color:	White, Gray, Tan



### RUSS For Angle Changes

TPO Pressure-Sensitive RUSS is a reinforced TPO membrane strip with a pressure sensitive tape laminated along one edge. Placed below the deck membrane, TPO Pressure-Sensitive RUSS™ provides membrane securement at angle changes without penetrating the sheet.

#### RUSS for Angle Changes

##### Typical Properties and Characteristics

Base:	Membrane-TPO (Polyester Reinforced) Adhesive-Synthetic Rubber
Thickness:	Membrane 0.045" (1.14mm) Adhesive 0.035" (0.89mm)
Size:	10" x 100' (250mm x 30m)
Packaging:	100 lf/ctn (30m) - 1 roll
Weight/Carton:	32 lbs. (14.5 kg)
Shelf Life:	1 year



ROOFING AMERICA: OVER 40 YEARS AND 10 BILLION SQUARE FEET™

**800-4-SYNTEC**  
www.carlisle-syntec.com

Carlisle SynTec Incorporated  
P.O. Box 7000 • Carlisle, PA 17013  
International: 717-245-7000  
Fax: 717-245-7143  
market@syntec.carlisle.com

Carlisle and Sure-Weld are trademarks of  
Carlisle SynTec Incorporated.

REPRINT REQUEST CODE  
601960 - "SW Pre-Fab Accessories" - 020705

© 2005 Carlisle SynTec Incorporated  
Printed in U.S.A.



Carlisle SynTec Incorporated